

- Extruded aluminium and die-cast aluminium housing
- DuPont Outdoor UV resistant powdercoat finish
- 316# stainless steel screws/ Integral gear
- Fire resistant silicone seal waterproof gasket
- 8mm thick toughened FLUSH glass with trim
- CE/ SAA/ IP65/ Class 1
- Lamp: CREE COB
- CCT: 3000K/4000K/5000K/CRI ≥ 80 (Optional: CRI 95)
- Beam Angle: 24° / 36° / 60°
- Meanwell driver: 100-240VAC/ Constant current/ WT:-30~ +70° C
- Warranty: 3 years (Optional: 5 years)

- **CODE**      **COLOR**
- UDSB15152    BLACK
- UDSG15152    GREY
- UDSW15152    WHITE

**POWER:** 2x15W/20W

- **CODE**      **COLOR**
- UDSB15202    BLACK
- UDSG15202    GREY
- UDSW15202    WHITE

**POWER:** 2x15W/20W/30W

- **CODE**      **COLOR**
- UDSB15302    BLACK
- UDSG15302    GREY
- UDSW15302    WHITE

**POWER:** 2x15W/20W/30W

- **CODE**      **COLOR**
- UDSB15502    BLACK
- UDSG15502    GREY
- UDSW15502    WHITE

**POWER:** 2x15W/20W/30W

- **CODE**      **COLOR**
- UDSB15151    BLACK
- UDSG15151    GREY
- UDSW15151    WHITE





**POWER:** 1x15W/20W/30W

- **CODE**      **COLOR**
- UDSB15201    BLACK
- UDSG15201    GREY
- UDSW15201    WHITE



**POWER:** 1x15W/20W/30W

- **CODE**      **COLOR**
- UDSB15301    BLACK
- UDSG15301    GREY
- UDSW15301    WHITE

**POWER:** 1x15W/20W/30W



• **PHOTOMETRIC [Unit: cd]**

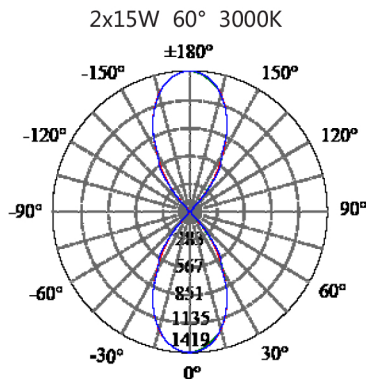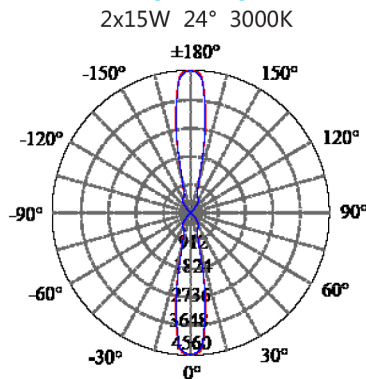

• **POWER DETAILS (DOWNLOAD IES FILES ON [www.2020light.com](http://www.2020light.com))**

2x15W	CREE CXA1512	24°	2632lm	36°	2592lm	60°	2552lm
2x20W	CREE CXA2520	24°	3509lm	36°	3456lm	60°	3402lm
2x30W	CREE CXA2520	24°	5264lm	36°	5184lm	60°	5104lm
1x15W	CREE CXA1512	24°	1319lm	36°	1299lm	60°	1279lm
1x20W	CREE CXA2520	24°	1758lm	36°	1732lm	60°	1705lm
1x30W	CREE CXA2520	24°	2638lm	36°	2598lm	60°	2558lm