



- Extruded aluminium and die-cast aluminium housing
- DuPont Outdoor UV resistant powdercoat finish
- 316# stainless steel screws/ Integral gear
- Fire resistant silicone seal waterproof gasket
- 8mm thick toughened FLUSH glass with trim
- CE/ SAA/ IP65/ Class 1
- Lamp: CREE COB
- CCT: 3000K/4000K/5000K/CRI ≥ 80 (Optional: CRI 95)
- Beam Angle: 24° / 36° / 60°
- Meanwell driver: 100-240VAC/ Constant current/ WT:-30~+70° C
- Warranty: 3 years (Optional: 5 years)

• CODE	COLOR
SDRB2020	BLACK
SDRG2020	GREY
SDRW2020	WHITE



POWER: 1x20W30W/60W

• CODE	COLOR
SDRB2030	BLACK
SDRG2030	GREY
SDRW2030	WHITE

POWER: 1x20W30W/60W



• PHOTOMETRIC [Unit: cd]

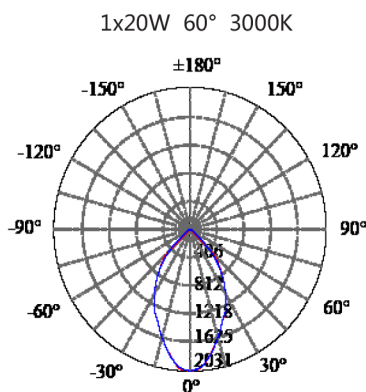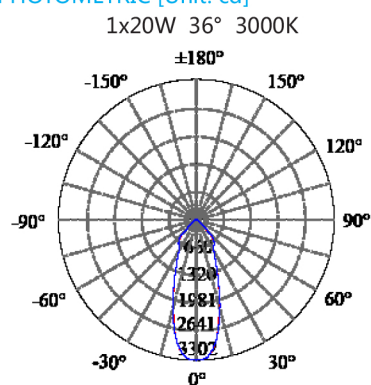

• POWER DETAILS (DOWNLOAD IES FILES ON www.2020light.com)

1x20W	CREE CXA2520	24° 2272lm / 36° 2234lm / 60° 2196lm
1x30W	CREE CXA2520	24° 3408lm / 36° 3351lm / 60° 3294lm
1x60W	CREE CXA2530	24° 6816lm / 36° 6702lm / 60° 6588lm