




XT LIGHTING DATASHEET: UDSA 100 Series

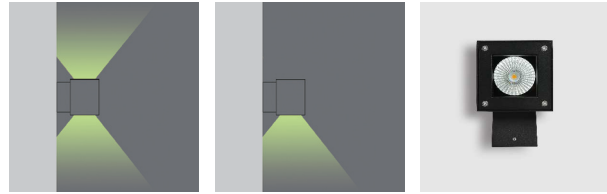

- Extruded & die-cast aluminium housing
- DuPont outdoor UV resistant powdercoat finish
- 304# stainless steel screws/ Integral gear
- Fire resistant silicone seal waterproof gasket
- 8mm thick toughened FLUSH glass with trim
- CE/ SAA/ IP65/ Class 1
- Lamp: CREE COB
- CCT: 3000K/4000K/5000K/CRI \geq 80 (Optional: CRI 95)
- Beam Angle: 12° /24° /36° /60°
- HEP Driver: 220-240Vac/ Constant current/ WT:-20~+50° C
- Warranty: 3 years (Optional: 5 years)

• **CODE** **COLOR**

UDSB10102 BLACK
UDSG10102 GREY
UDSW10102 WHITE

POWER: 2x5W

• **CODE** **COLOR**

UDSB10152 BLACK
UDSG10152 GREY
UDSW10152 WHITE

POWER: 2x5/8W

• **CODE** **COLOR**

UDSB10202 BLACK
UDSG10202 GREY
UDSW10202 WHITE

POWER: 2x5/8W

• **CODE** **COLOR**

UDSB10101 BLACK
UDSG10101 GREY
UDSW10101 WHITE

POWER: 1x5W

• **CODE** **COLOR**




UDSB10151 BLACK
UDSG10151 GREY
UDSW10151 WHITE

POWER: 1x5/10W

• **CODE** **COLOR**


UDSB10201 BLACK
UDSG10201 GREY
UDSW10201 WHITE

POWER: 1x5/10W




• **PHOTOMETRIC [Unit: cd]**

2x5W 60° 3000K

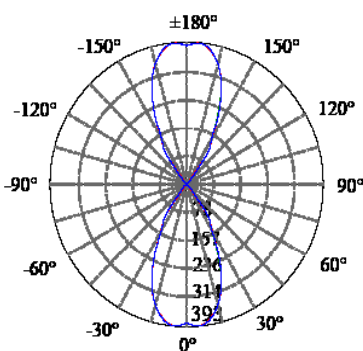

1x5W 60° 3000K

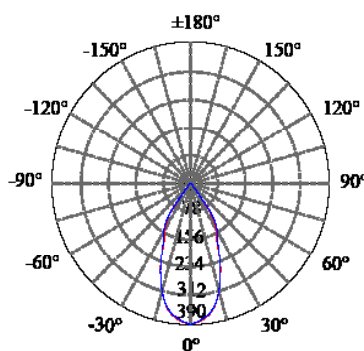

• **POWER DETAILS**

2x5W CREE CXA1304 12° 1139lm /24° 1065lm /36° 954lm /60° 956lm
2x10W CREE CXA1507 12° 2208lm /24° 2004lm /36° 1872lm /60° 1404lm
1x5W CREE CXA1304 12° 603lm /24° 561lm /36° 504lm /60° 438lm
1x10W CREE CXA1512 12° 1079lm /24° 1012lm /36° 946lm /60° 825lm

email: sales@xt.lighting