





ECOLUX WR 145 G2

- LED downlight with aluminium alloy heat sink
- One piece SMD 5630 LED chip
- Dimmable
- 30000+ life span
- Input voltage; AC100-240V
- CRI>80
- 90 deg beam angle
- Available IP44
- Fittings to be run with constant current LED driver (please contact office for details)
- White, silver

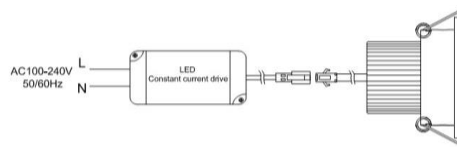

Lamp source	Code	Apprx Lumen (lm)	Dimensions (approx mm)
13w LED 3000k	TUWR145G2.13.WW	1060	Dia 145 x 45 cut out 120-130
13w LED 4000k	TUWR145G2.13.WW	1160	Dia 145 x 45 cut out 120-130
13w LED 5000k	TUWR145G2.13.WW	1260	Dia 145 x 45 cut out 120-130
18w LED 5000k	TUWR145G2.18.WW	1300	Dia 145 x 45 cut out 120-130
18w LED 5000k	TUWR145G2.18.WW	1460	Dia 145 x 45 cut out 120-130
18w LED 5000k	TUWR145G2.18.WW	1620	Dia 145 x 45 cut out 120-130

