




XT LIGHTING DATASHEET: UDNBSA100 Series

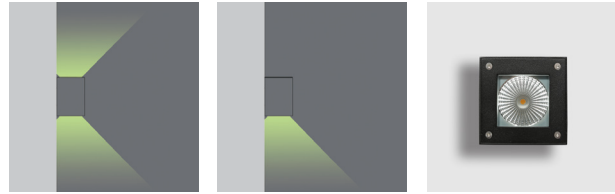



- Extruded & die-cast aluminium housing
- DuPont outdoor UV resistant powdercoat finish
- 304# stainless steel screws/ Integral gear
- Fire resistant silicone seal waterproof gasket
- 8mm thick toughened FLUSH glass with trim
- CE/ SAA/ IP65/ Class 1
- Lamp: CREE COB
- CCT: 3000K/4000K/5000K/CRI \geq 80 (Optional: CRI 95)
- Beam Angle: 12° /24° /36° /60°
- HEP Driver: 220-240Vac/ Constant current/ WT:-20~+50° C
- Warranty: 3 years (Optional: 5 years)

- **CODE** **COLOR**
- UDSNB10152 BLACK
- UDSNG10152 GREY
- UDSNW10152 WHITE
- POWER:** 2x5/8W



- **CODE** **COLOR**
- UDSNB10202 BLACK
- UDSNG10202 GREY
- UDSNW10202 WHITE
- POWER:** 2x5/8W

- **CODE** **COLOR**
- UDSNB10151 BLACK
- UDSNG10151 GREY
- UDSNW10151 WHITE
- POWER:** 1x5/10W

- **CODE** **COLOR**
- UDSNB15201 BLACK
- UDSNG15201 GREY
- UDSNW15201 WHITE
- POWER:** 1x5/10W



• PHOTOMETRIC [Unit: cd]

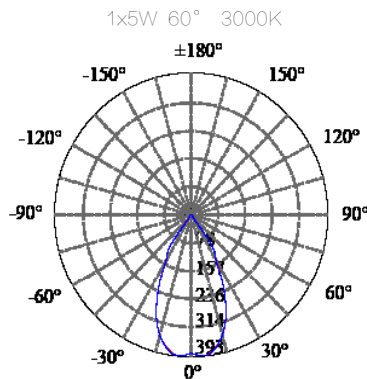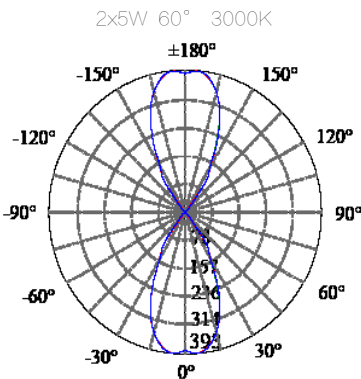

• POWER DETAILS

- 2x5W CREE CXA1304 12° 1139lm /24° 1065m /36° 954lm /60° 956lm
- 2x10W CREE CXA1507 12° 2208lm /24° 2004lm /36° 1872lm /60° 1404lm
- 1x5W CREE CXA1304 12° 603lm /24° 561lm /36° 504lm /60° 438lm
- 1x10W CREE CXA1512 12° 1079lm /24° 1012lm /36° 946lm /60° 825lm

email: sales@xt.lighting