







XT LIGHTING DATASHEET: UDSSR100


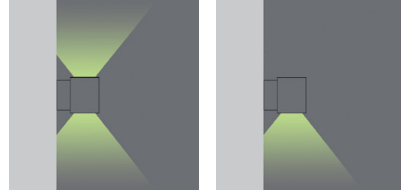


- 316L# stainless steel housing
- 316# stainless steel screws/ Integral gear
- Fire resistant silicone seal waterproof gasket
- 8mm thick toughened FLUSH glass with trim
- CE/ SAA/ IP65/ Class 1
- Lamp: CREE COB
- CCT: 3000K/4000K/5000K/CRI \geq 80 (Optional: CRI 90/95)
- Beam Angle: 12° /24° / 36° / 60°
- HEP Driver: 220-240Vac/ Constant current/ WT:-20~+50° C
- Warranty: 3 years (Optional: 5 years)

- | | | |
|--|---|---|
| <ul style="list-style-type: none"> • CODE COLOR UDRSSM10102 MIRRORED UDRSSB10102 BRUSHED POWER: 2x5W | <ul style="list-style-type: none"> • CODE COLOR UDRSSM10152 MIRRORED UDRSSB10152 BRUSHED POWER: 2x5/8W | <ul style="list-style-type: none"> • CODE COLOR UDRSSM10202 MIRRORED UDRSSB10202 BRUSHED POWER: 2x5/8W |
| <ul style="list-style-type: none"> • CODE COLOR UDRSSM10101 MIRRORED UDRSSB10101 BRUSHED POWER: 1x5W | <ul style="list-style-type: none"> • CODE COLOR UDRSSM10151 MIRRORED UDRSSB10151 BRUSHED POWER: 1x5/10W | <ul style="list-style-type: none"> • CODE COLOR UDRSSM10201 MIRRORED UDRSSB10201 BRUSHED POWER: 1x5/10W |



• **PHOTOMETRIC [Unit: cd]**

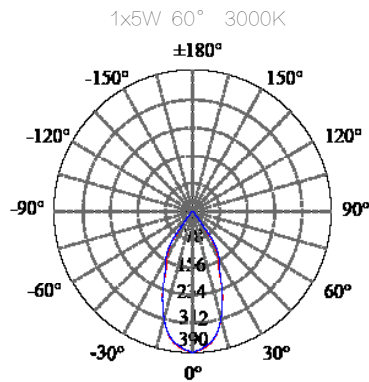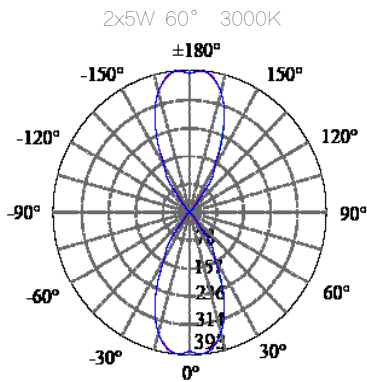

• **POWER DETAILS (DOWNLOAD IES FILES Available online)**

- 2x5W CREE CXA1304 12° 1139lm /24° 1065m /36° 954lm /60° 956lm
- 2x10W CREE CXA1507 12° 2208lm /24° 2004lm /36° 1872lm /60° 1404lm
- 1x5W CREE CXA1304 12° 603lm /24° 561lm /36° 504lm /60° 438lm
- 1x10W CREE CXA1512 12° 1079lm /24° 1012lm /36° 946lm /60° 825lm