







XT-UDSSS100.100/150/200mm

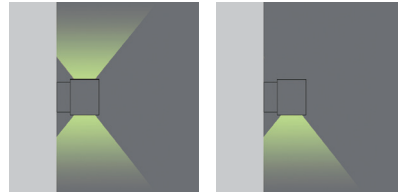



- 316L# stainless steel housing
- 316# stainless steel screws/ Integral gear
- Fire resistant silicone seal waterproof gasket
- 8mm thick toughened FLUSH glass with trim
- CE/ SAA/ IP65/ Class 1
- Lamp: CREE COB
- CCT: 3000K/4000K/5000K/CRI \geq 80 (Optional: CRI 95)
- Beam Angle: 12° /24° / 36° / 60°
- HEP Driver: 220-240Vac/ Constant current/ WT:-20~+50° C
- Warranty: 3 years (Optional: 5 years)

- | | | | | | |
|---------------|--------------|---------------|--------------|---------------|--------------|
| • CODE | COLOR | • CODE | COLOR | • CODE | COLOR |
| UDSSSM10102 | MIRRORED | UDSSSM10152 | MIRRORED | UDSSSM10202 | MIRRORED |
| UDSSSB10102 | BRUSHED | UDSSSB10152 | BRUSHED | UDSSSB10202 | BRUSHED |
| POWER: 2x5W | | POWER: 2x5/8W | | POWER: 2x5/8W | |

- | | | | | | |
|---------------|--------------|----------------|--------------|----------------|--------------|
| • CODE | COLOR | • CODE | COLOR | • CODE | COLOR |
| UDSSSM10101 | MIRRORED | UDSSSM10151 | MIRRORED | UDSSSM10201 | MIRRORED |
| UDSSSB10101 | BRUSHED | UDSSSB10151 | BRUSHED | UDSSSB10201 | BRUSHED |
| POWER: 1x5W | | POWER: 1x5/10W | | POWER: 1x5/10W | |



• **PHOTOMETRIC [Unit: cd]**

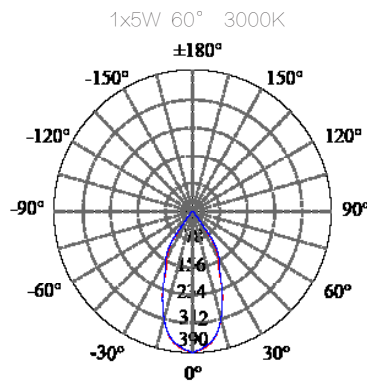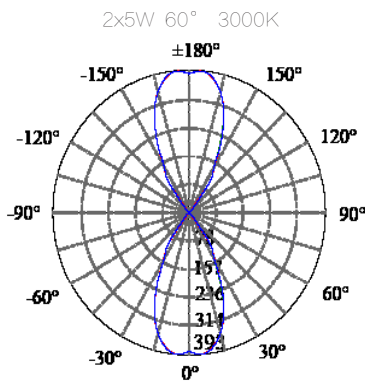

- **POWER DETAILS**
- | | | | | | | | | | |
|-------|--------------|-----|--------|------|--------|------|--------|------|--------|
| 2x5W | CREE CXA1304 | 12° | 1139lm | /24° | 1065lm | /36° | 954lm | /60° | 956lm |
| 2x10W | CREE CXA1507 | 12° | 2208lm | /24° | 2004lm | /36° | 1872lm | /60° | 1404lm |
| 1x5W | CREE CXA1304 | 12° | 603lm | /24° | 561lm | /36° | 504lm | /60° | 438lm |
| 1x10W | CREE CXA1512 | 12° | 1079lm | /24° | 1012lm | /36° | 946lm | /60° | 825lm |

email: sales@xt.lighting