



- 316L# stainless steel housing
- 316# stainless steel screws/ Integral gear
- Fire-resistant silicone seal waterproof gasket
- 4mm thick PMMA diffuser
- CE/ SAA/ IP65/ Class 1
- Lamp: CREE COB
- CCT: 3000K/4000K/5000K/CRI ≥ 80 (Optional: CRI 95)
- Meanwell driver: 100-240VAC/ Constant current/ WT:-30~+70° C
- Warranty: 3 years (Optional: 5 years)

- **CODE** **COLOR**
- BLFLSSM15100 MIRRORED
- BLFLSSB15100 BRUSHED


POWER:1x15W/20W

- **CODE** **COLOR**
- BLFLSSM1570 MIRRORED
- BLFLSSB1570 BRUSHED

POWER:1x15W/20W



- **PHOTOMETRIC [Unit: cd]**
- 1x15W 3000K

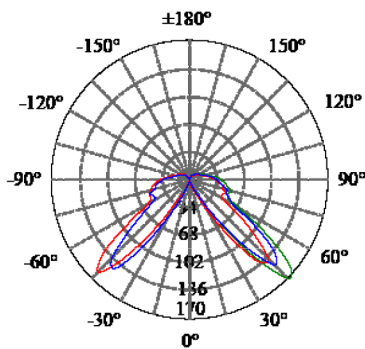

- **POWER DETAILS (DOWNLOAD IES FILES ON www.2020light.com)**
- 1x15W CREE CXA1512 567lm
- 1x20W CREE CXA2520 980lm