




XT LIGHTING DATASHEET XT-SDRSS100 Series



- 316L# stainless steel housing
- 316# stainless steel screws/ Integral gear
- Fire resistant silicone seal waterproof gasket
- 8mm thick toughened FLUSH glass with trim
- CE/ SAA/ IP65/ Class 1
- Lamp: CREE COB
- CCT: 3000K/4000K/5000K/CRI \geq 80 (Optional: CRI 90/95)
- Beam Angle: 12° /24° / 36° / 60°
- HEP Driver: 220-240Vac/ Constant current/ WT:-20~+50° C
- Warranty: 3 years (Optional: 5 years)


• **CODE** **COLOR**
 SDRSSM1010 MIRRORED
 SDRSSB1010 BRUSHED

POWER: 1x5/10W




• **CODE** **COLOR**
 SDRSSM1015 MIRRORED
 SDRSSB1015 BRUSHED

POWER: 1x5W/10W




• **CODE** **COLOR**
 SDRSSM1020 MIRRORED
 SDRSSB1020 BRUSHED

POWER: 1x5W/10W



• **PHOTOMETRIC [Unit: cd]**

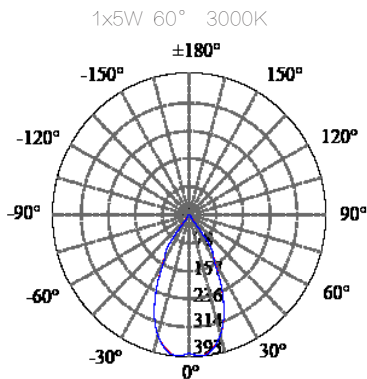

• **POWER DETAILS**

1x5W CREE CXA1304 12° 603lm /24° 561lm /36° 504lm /60° 438lm
 1x10W CREE CXA1512 12° 1079lm /24° 1012lm /36° 946lm /60° 825lm