




# XT LIGHTING DATASHEET: UDSSR80

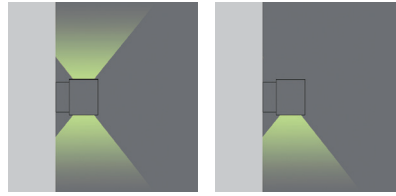

- 316L# stainless steel housing
- 316# stainless steel screws/ Integral gear
- Fire resistant silicone seal waterproof gasket
- 8mm thick toughened FLUSH glass with trim
- CE/ SAA/ IP65/ Class 1
- Lamp: CREE COB
- CCT: 3000K/4000K/5000K/CRI ≥ 80 (Optional: CRI 95)
- Beam Angle: 12° /24° / 36° / 60°
- HEP Driver: 220-240Vac/ Constant current/ WT:-20~+50° C
- Warranty: 3 years (Optional: 5 years)

• **CODE**      **COLOR**  
 UDRSSM08102 MIRRORED  
 UDRSSB08102 BRUSHED  
 POWER: 2x5W




• **CODE**      **COLOR**  
 UDRSSM08152 MIRRORED  
 UDRSSB08152 BRUSHED  
 POWER: 2x5/8W

• **CODE**      **COLOR**  
 UDRSSM08202 MIRRORED  
 UDRSSB08202 BRUSHED  
 POWER: 2x5/8W


• **CODE**      **COLOR**  
 UDRSSM08101 MIRRORED  
 UDRSSB08101 BRUSHED  
 POWER: 1x5W

• **CODE**      **COLOR**  
 UDRSSM08151 MIRRORED  
 UDRSSB08151 BRUSHED  
 POWER: 1x5/10W


• **CODE**      **COLOR**  
 UDRSSM08201 MIRRORED  
 UDRSSB08201 BRUSHED  
 POWER: 1x5/10W



• **PHOTOMETRIC [Unit: cd]**  
 2x5W 48° 3000K

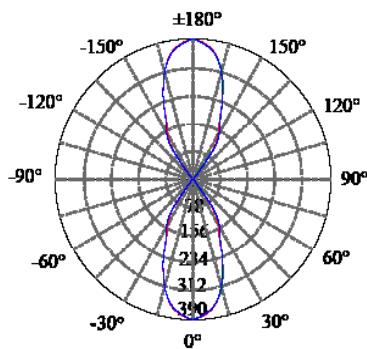

1x5W 48° 3000K

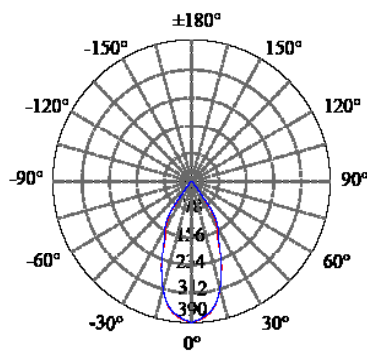

• **POWER DETAILS ( DOWNLOAD IES FILES See website)**

2x5W CREE CXA1304 12° 1219lm /24° 1162m /36° 1059lm /60° 986lm  
 2x10W CREE CXA1507 12° 2208lm /24° 2004lm /36° 1872lm /60° 1404lm  
 1x5W CREE CXA1304 12° 623lm /24° 581lm /36° 514lm /60° 478lm  
 1x10W CREE CXA1512 12° 1121lm /24° 1022lm /36° 966lm /60° 832lm