




XT LIGHTING DATASHEET: UDSS80.150/150/200mm

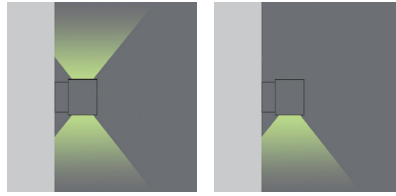

- 316L# stainless steel housing
- 316# stainless steel screws/ Integral gear
- Fire resistant silicone seal waterproof gasket
- 8mm thick toughened FLUSH glass with trim
- CE/ SAA/ IP65/ Class 1
- Lamp: CREE COB
- CCT: 3000K/4000K/5000K/CRI \geq 80 (Optional: CRI 95)
- Beam Angle: 12° /24° / 36° / 60°
- HEP Driver: 220-240Vac/ Constant current/ WT:-20~+50° C
- Warranty: 3 years (Optional: 5 years)

- **CODE** **COLOR**
UDSSM08102 MIRRORED
UDSSB08102 BRUSHED
- POWER: 2x5W




- **CODE** **COLOR**
UDSSM08152 MIRRORED
UDSSB08152 BRUSHED
- POWER: 2x5/8W

- **CODE** **COLOR**
UDSSM08202 MIRRORED
UDSSB08202 BRUSHED
- POWER: 2x5/8W



- **CODE** **COLOR**
UDSSM08101 MIRRORED
UDSSB08101 BRUSHED
- POWER: 1x5W

- **CODE** **COLOR**
UDSSM08151 MIRRORED
UDSSB08151 BRUSHED
- POWER: 1x5/10W

- **CODE** **COLOR**
UDSSM08201 MIRRORED
UDSSB08201 BRUSHED
- POWER: 1x5/10W



• PHOTOMETRIC [Unit: cd]

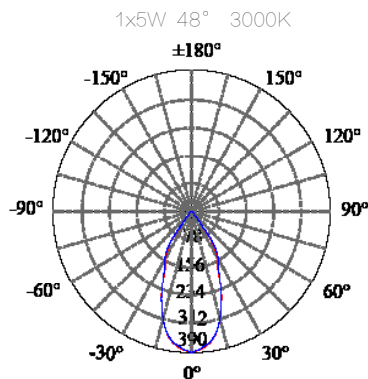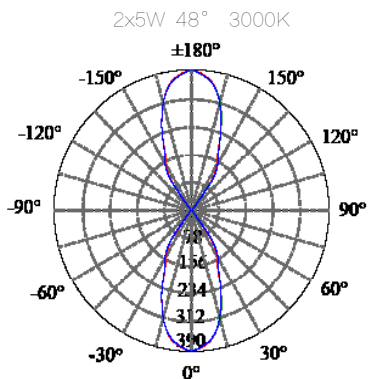

• POWER DETAILS

- 2x5W CREE CXA1304 12° 1219lm /24° 1162lm /36° 1059lm /60° 986lm
- 2x10W CREE CXA1507 12° 2208lm /24° 2004lm /36° 1872lm /60° 1404lm
- 1x5W CREE CXA1304 12° 623lm /24° 581lm /36° 514lm /60° 478lm
- 1x10W CREE CXA1512 12° 1121lm /24° 1022lm /36° 966lm /60° 832lm