Flood Light Series

XT1102F



Product Introduction


- 1. Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
- 2. With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
- 3. Light body adopts high pressure die-casting aluminum, surface with electrostatic plastic coating. Lampshade adopts high strength toughened glass, resist the impact and friction.
- 4. Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
- 5. Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.


Specification

Product Code	XT1102FD-36	XT1102FC-36	XT1102FB-36	XT1102FC-24
LED Brand	CREE	CREE	CREE	CREE
LED Quantity	36pcs	36pcs	36pcs	24pcs
Rated Power	105W	86W	60W	50W
Input Voltage	AC100-240V	DC24V/AC100-240V		AC100-240V
Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
Color	Single	Single	Single	Single
Beam Angle	5° 10° 12.5° 20° 30° 45° 60° 15X30° 10X60°			
Control Model	СС	СС	СС	СС
Life	50000H	50000H	50000H	50000H
Protection Grade	IP66	IP66	IP66	IP66
Ambient Temperature	-25°C∽50°C	-25℃∽50℃	-25℃∽50℃	–25℃∽50℃
Ambient Humidity	10%∽90%	10%~90%	10%∽90%	10%∽90%

Distribution Curve Flux (SBC Case)

XT1102UC-36



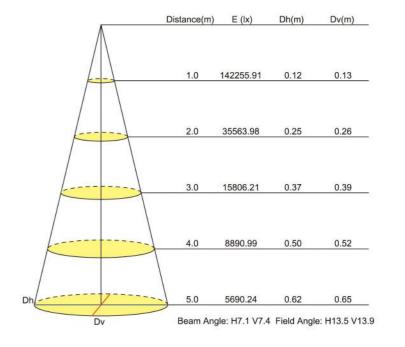

XTlighting