

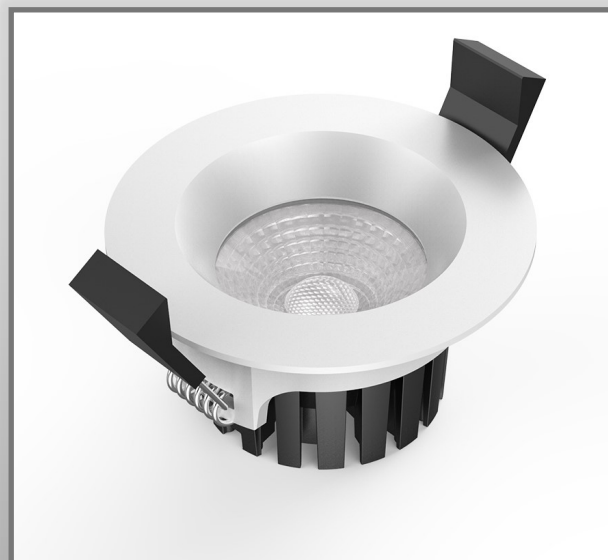
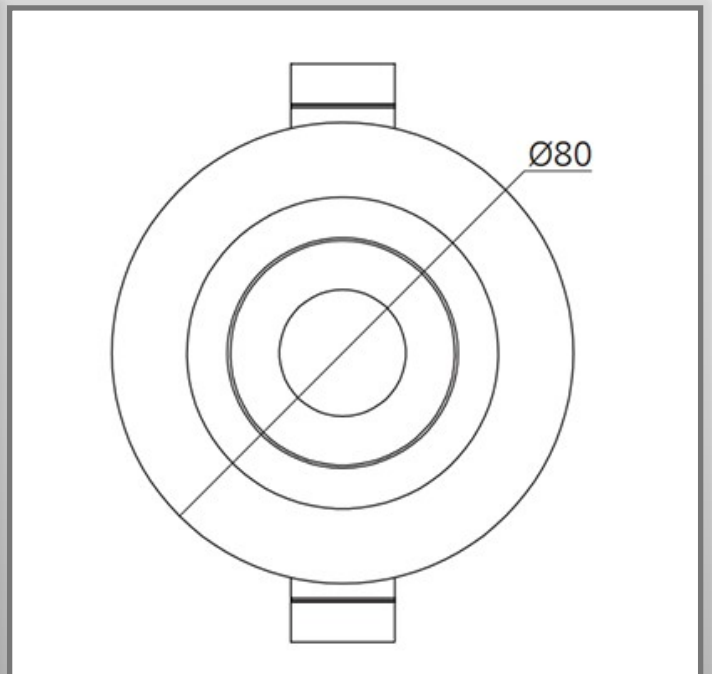
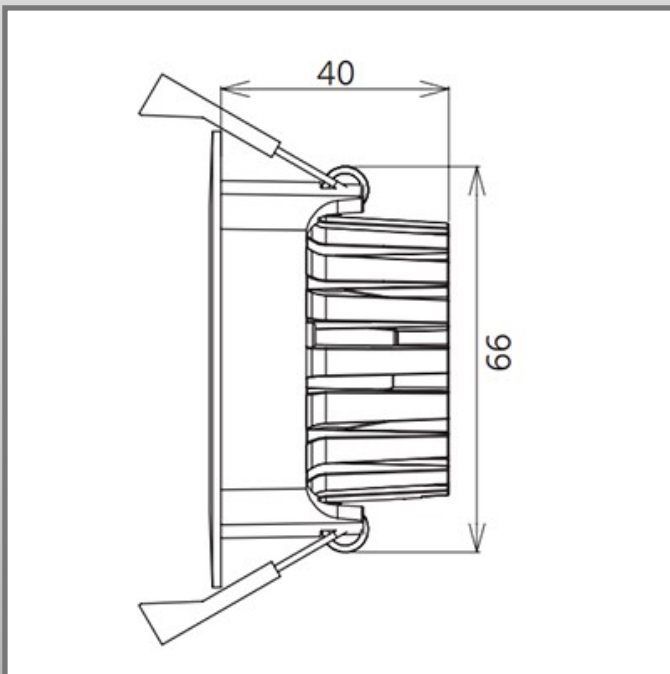


## BONITO: BL80 IP65 DOWNLIGHT

Triac dim, 0-10V dim, DALI dim  
36°/60° wide beam angle  
Ø68-72mm cutout  
CCT: 2700K 3000K 4000K 5000K

**IP65**

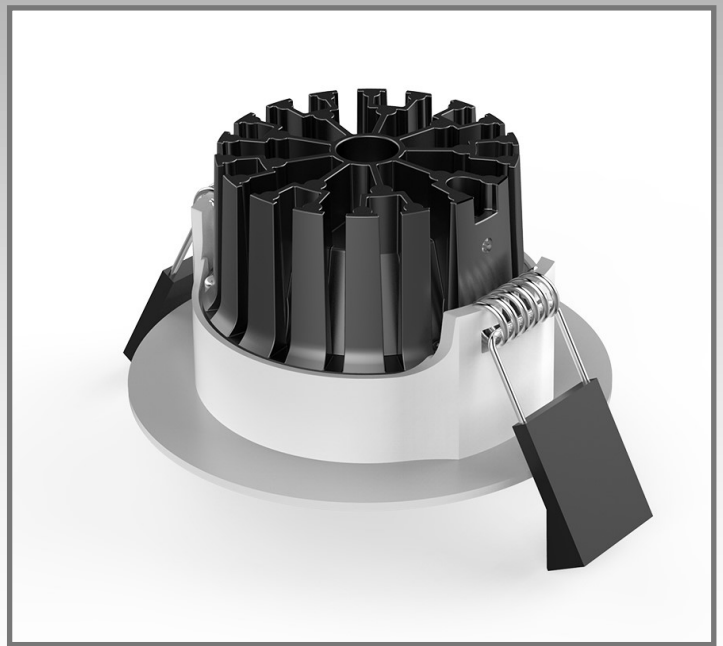

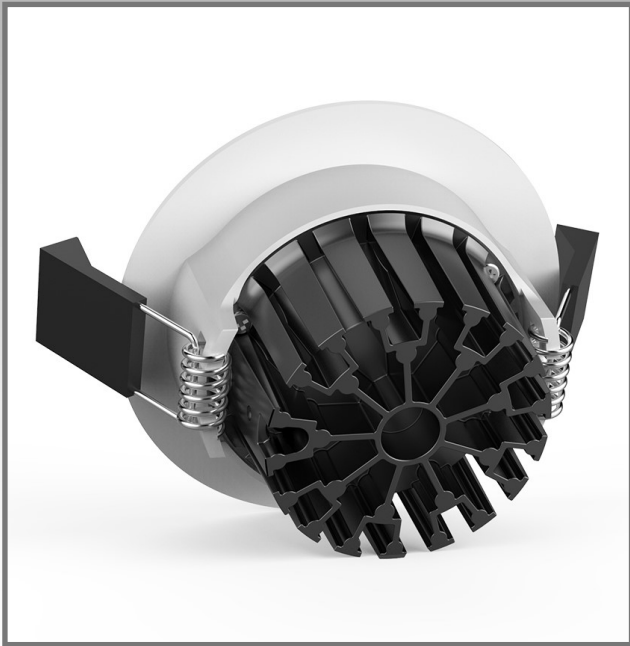

Power	Voltage	Power	Lumens	CCT	CRI	Dimmable	Dimension	Cutout
5W	AC240V	≥0.9	460	2700K	≥80	Yes	80*40mm	68-72mm
5W	AC240V	≥0.9	475	3000K	≥80	Yes	80*40mm	68-72mm
5W	AC240V	≥0.9	525	4000K	≥80	Yes	80*40mm	68-72mm
5W	AC240V	≥0.9	520	5000K	≥80	Yes	80*40mm	68-72mm
5W	AC240V	≥0.9	345	2700K	≥90	Yes	80*40mm	68-72mm
5W	AC240V	≥0.9	365	3000K	≥90	Yes	80*40mm	68-72mm
5W	AC240V	≥0.9	400	4000K	≥90	Yes	80*40mm	68-72mm
5W	AC240V	≥0.9	375	5000K	≥90	Yes	80*40mm	68-72mm

Power	Voltage	Power	Lumens	CCT	CRI	Dimmable	Dimension	Cutout
8W	AC240V	≥0.9	695	2700K	≥80	Yes	80*40mm	68-72mm
8W	AC240V	≥0.9	720	3000K	≥80	Yes	80*40mm	68-72mm
8W	AC240V	≥0.9	805	4000K	≥80	Yes	80*40mm	68-72mm
8W	AC240V	≥0.9	780	5000K	≥80	Yes	80*40mm	68-72mm
8W	AC240V	≥0.9	530	2700K	≥90	Yes	80*40mm	68-72mm
8W	AC240V	≥0.9	560	3000K	≥90	Yes	80*40mm	68-72mm
8W	AC240V	≥0.9	620	4000K	≥90	Yes	80*40mm	68-72mm
8W	AC240V	≥0.9	575	5000K	≥90	Yes	80*40mm	68-72mm