




XT LIGHTING DATASHEET: UDRA 200 Series

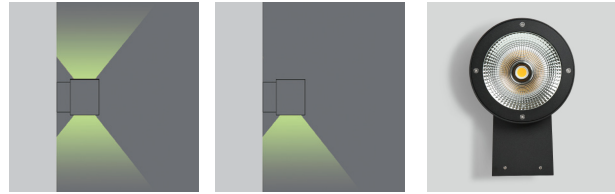

- Extruded & die-cast aluminium housing
- DuPont outdoor UV resistant powdercoat finish
- 304# stainless steel screws/ Integral gear
- Fire resistant silicone seal waterproof gasket
- 8mm thick toughened FLUSH glass with trim
- CE/ SAA/ IP65/ Class 1
- Lamp: CREE COB
- CCT: 3000K/4000K/5000K/CRI \geq 80 (Optional: CRI 95)
- Beam Angle: 12° /24° /36° /60°
- Philips Driver: 220-240Vac/ Constant current/ WT:-20~+50° C
- Warranty: 3 years (Optional: 5 years)

• **CODE** **COLOR**

UDRB20202 BLACK
UDRG20202 GREY
UDRW20202 WHITE

POWER: 2x20/30/40/60W

• **CODE** **COLOR**

UDRB20252 BLACK
UDRG20252 GREY
UDRW20252 WHITE

POWER: 2x20/30/40/60W

• **CODE** **COLOR**

UDRB20302 BLACK
UDRG20302 GREY
UDRW20302 WHITE

POWER: 2x20/30/40/60W

• **CODE** **COLOR**

UDRB20201 BLACK
UDRG20201 GREY
UDRW20201 WHITE

POWER: 1x20/30/40/60W

• **CODE** **COLOR**




UDRB20251 BLACK
UDRG20251 GREY
UDRW20251 WHITE

POWER: 1x20/30/40/60W



• **CODE** **COLOR**

UDRB20301 BLACK
UDRG20301 GREY
UDRW20301 WHITE

POWER: 1x20/30/40/60W



• **PHOTOMETRIC [Unit: cd]**

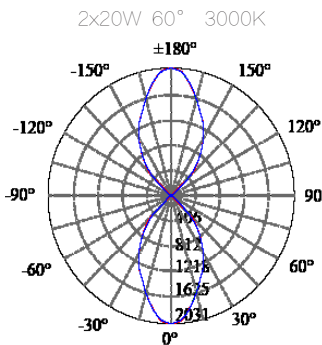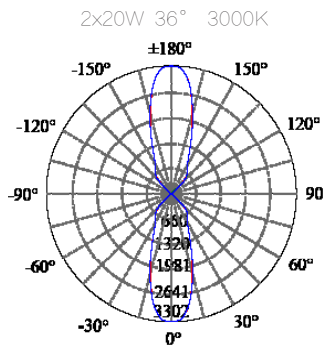

• **POWER DETAILS**

2x20W	CREE CXA2520	12°	4886lm	/24°	4672lm	/36°	4459lm	/60°	4247lm
2x30W	CREE CXA2520	12°	7329lm	/24°	7008lm	/36°	6688lm	/60°	6370lm
2x40W	CREE CXA2530	12°	9784lm	/24°	9342lm	/36°	8922lm	/60°	8495lm
2x60W	CREE CXA2520	12°	14658lm	/24°	14032lm	/36°	13321lm	/60°	12758lm
1x20W	CREE CXA2520	12°	2448lm	/24°	2349lm	/36°	2234lm	/60°	2127lm
1x30W	CREE CXA2520	12°	3756lm	/24°	3566lm	/36°	3374lm	/60°	3185lm
1x40W	CREE CXA2530	12°	4876lm	/24°	4633lm	/36°	4478lm	/60°	4270lm
1x60W	CREE CXA2530	12°	7346lm	/24°	7033lm	/36°	6562lm	/60°	6269lm

email: sales@xt.lighting