




XT LIGHTING DATASHEET: UDRA80 Series

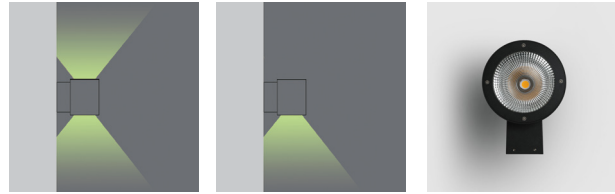

- Extruded & die-cast aluminium housing
- DuPont outdoor UV resistant powdercoat finish
- 304# stainless steel screws/ Integral gear
- Fire resistant silicone seal waterproof gasket
- 8mm thick toughened FLUSH glass with trim
- CE/ SAA/ IP65/ Class 1
- Lamp: CREE COB
- CCT: 3000K/4000K/5000K/CRI \geq 80 (Optional: CRI 95)
- Beam Angle: 12° /24° / 36° / 60°
- HEP Driver: 220-240Vac/ Constant current/ WT:-20~+50° C
- Warranty: 3 years (Optional: 5 years)

- **CODE** **COLOR**
- UDRB08102 BLACK
- UDRG08102 GREY
- UDRW08102 WHITE
- POWER:** 2x5W




- **CODE** **COLOR**
- UDRB08152 BLACK
- UDRG08152 GREY
- UDRW08152 WHITE
- POWER:** 2x5/8W

- **CODE** **COLOR**
- UDRB08202 BLACK
- UDRG08202 GREY
- UDRW08202 WHITE
- POWER:** 2x5/8W

- **CODE** **COLOR**
- UDRB08101 BLACK
- UDRG08101 GREY
- UDRW08101 WHITE
- POWER:** 1x5W


- **CODE** **COLOR**
- UDRB08151 BLACK
- UDRG08151 GREY
- UDRW08151 WHITE
- POWER:** 1x5/10W

- **CODE** **COLOR**
- UDRB08201 BLACK
- UDRG08201 GREY
- UDRW08201 WHITE
- POWER:** 1x5/10W

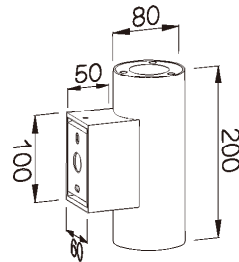


• **PHOTOMETRIC [Unit: cd]**

2x5W 48° 3000K

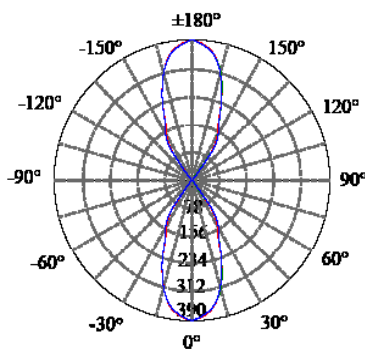

1x5W 48° 3000K

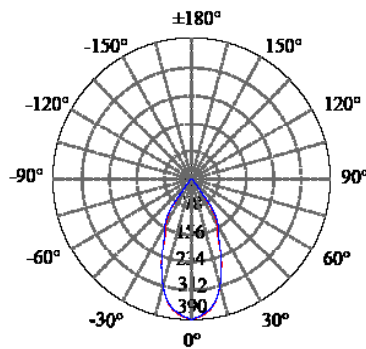

• **POWER DETAILS**

- 2x5W CREE CXA1304 12° 1219lm /24° 1162m /36° 1059lm /60° 986lm
- 2x10W CREE CXA1507 12° 2208lm /24° 2004lm /36° 1872lm /60° 1404lm
- 1x5W CREE CXA1304 12° 623lm /24° 581lm /36° 514lm /60° 478lm
- 1x10W CREE CXA1512 12° 1121lm /24° 1022lm /36° 966lm /60° 832lm

email: sales@xt.lighting