




# XT LIGHTING DATASHEET: UDSA80 Series

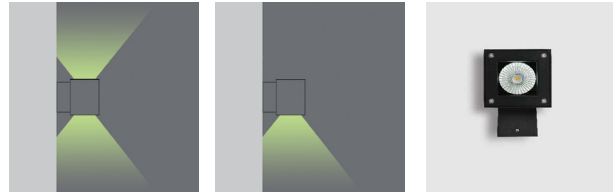

- Extruded & die-cast aluminium housing
- DuPont outdoor UV resistant powdercoat finish
- 304# stainless steel screws/ Integral gear
- Fire resistant silicone seal waterproof gasket
- 8mm thick toughened FLUSH glass with trim
- CE/ SAA/ IP65/ Class 1
- Lamp: CREE COB
- CCT: 3000K/4000K/5000K/CRI  $\geq$  80 (Optional: CRI 95)
- Beam Angle: 12° /24° / 36° / 60°
- HEP Driver: 220-240Vac/ Constant current/ WT:-20~+50° C
- Warranty: 3 years (Optional: 5 years)

• **CODE**      **COLOR**

UDSB08102 BLACK  
UDSG08102 GREY  
UDSW08102 WHITE

POWER: 2x5W

• **CODE**      **COLOR**

UDSB08152 BLACK  
UDSG08152 GREY  
UDSW08152 WHITE

POWER: 2x5/8W

• **CODE**      **COLOR**

UDSB08202 BLACK  
UDSG08202 GREY  
UDSW08202 WHITE

POWER: 2x5/8W

• **CODE**      **COLOR**

UDSB08101 BLACK  
UDSG08101 GREY  
UDSW08101 WHITE

POWER: 1x5W

• **CODE**      **COLOR**




UDSB08151 BLACK  
UDSG08151 GREY  
UDSW08151 WHITE

POWER: 1x5/10W



• **CODE**      **COLOR**

UDSB08201 BLACK  
UDSG08201 GREY  
UDSW08201 WHITE

POWER: 1x5/10W



• **PHOTOMETRIC [Unit: cd]**

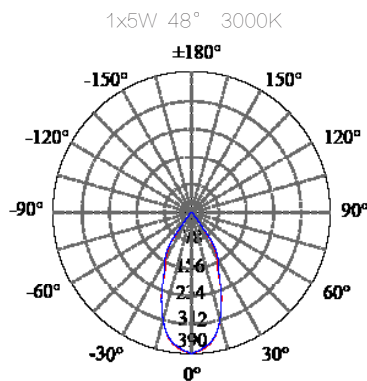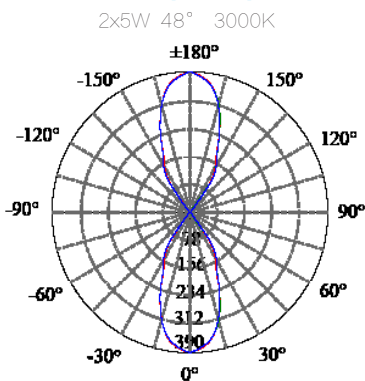

• **POWER DETAILS**

2x5W CREE CXA1304 12° 1219lm /24° 1162m /36° 1059lm /60° 986lm  
2x10W CREE CXA1507 12° 2208lm /24° 2004lm /36° 1872lm /60° 1404lm  
1x5W CREE CXA1304 12° 623lm /24° 581lm /36° 514lm /60° 478lm  
1x10W CREE CXA1512 12° 1121lm /24° 1022lm /36° 966lm /60° 832lm

email: [sales@xt.lighting](mailto:sales@xt.lighting)