





- 316L# stainless steel housing
- 316# stainless steel screws/ Integral gear
- Fire resistant silicone seal waterproof gasket
- 8mm thick toughened FLUSH glass with trim
- CE/ SAA/ IP65/ Class 1
- Lamp: CREE COB
- CCT: 3000K/4000K/5000K/CRI \geq 80 (Optional: CRI 95)
- Beam Angle: 12° /24° / 36° / 60°
- HEP Driver: 220-240Vac/ Constant current/ WT:-20~+50° C
- Warranty: 3 years (Optional: 5 years)

- **CODE** **COLOR**
 FLRSSM01015 MIRRORRED
 FLRSSB01015 BRUSHED

POWER: 1x5W/10W



• **PHOTOMETRIC** [Unit: cd]

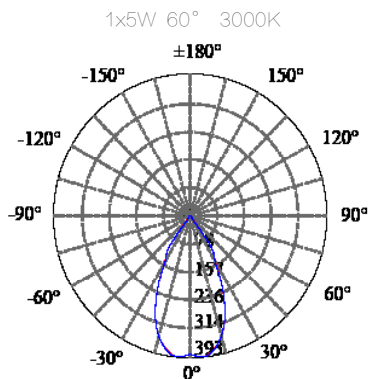

• **POWER DETAILS**

1x5W CREE CXA1304 12° 543lm /24° 493lm /36° 468lm /60° 455lm
 1x10W CREE CXA1512 12° 1341lm /24° 1232lm /36° 1170lm /60° 1136lm