


XT-AD105 (7W)

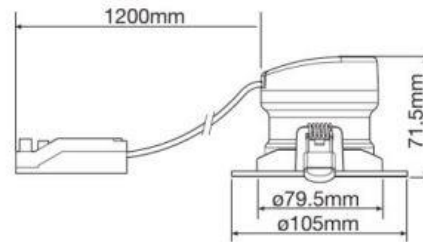

XT-AD105 (10W)

## ADJUSTABLE – IC-4 Rated LED RECESSED DOWNLIGHT

The XT-AD105 is an adjustable recessed polycarbonate LED downlight. A highly efficient LED interior light with 60° beam angle and an IC-4 rating meaning the downlight can be abutted or covered by normal flammable building materials including fixed building insulation. The temperature of this fitting does not exceed 90°C when building material abuts or covers the luminaire.

- Dimensions: 85mm (Diameter) 64.5mm (Depth)
- Mounting: Recessed
- Material: Polycarbonate
- Rating: IP40 & IC-4 rating
- LED Module (not replaceable) Lifetime: up to 30,000 h
- Adjustable swivel angle 30° Beam Angle:60°
- High lumen efficiency: 90 lm/W Luminous flux: 630 lm (7W) 920 lm (10W)
- Ambient temperature range: -20...+45 °C
- Dimmable
- Input Voltage: AC220-240V Mains Frequency; 50 Hz

CODE	V	W	COL	COL TEMP	CRI	LM	W	H	weight
XT-AD105 -7	220-240	7	White	3000/ 4000k	80	90	85	64.5	220g
XT-AD105 -10	220-240	10	White	3000/ 4000k	80	92	105	71.5	280g